MULTILEVEL CIRCULATION SYSTEM - UPPER ENTRY WITH TURNTABLE

DK-CG-H2-20T-2200K

DAE DUCK ENGINEERING CO,. LTD.

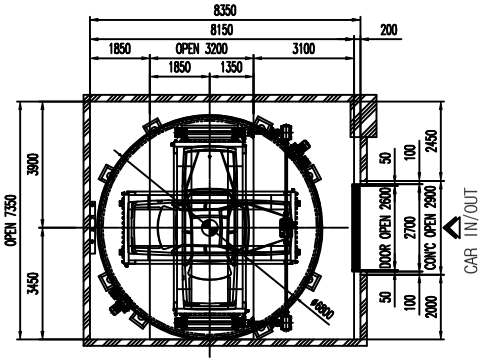

ENTRANCE TOP VIEW

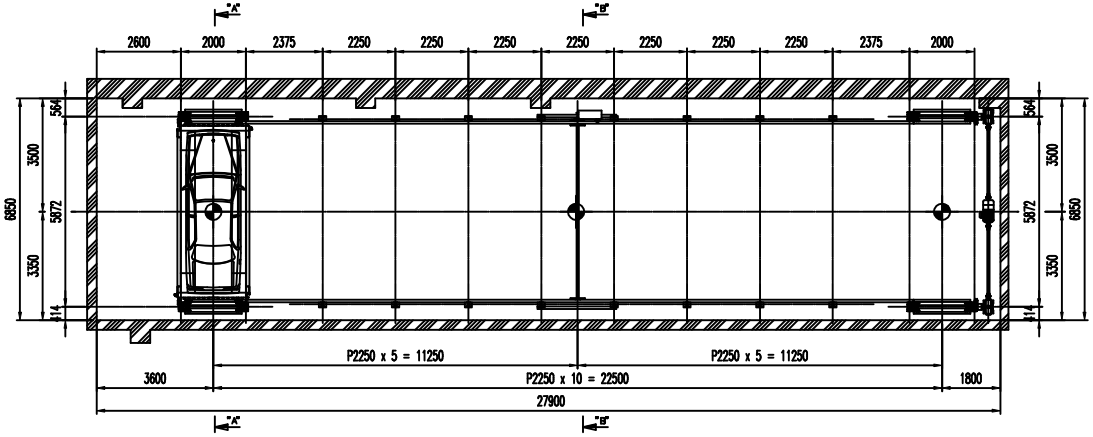

TOP VIEW

SPECIFICATION

MODEL		MULTILAVEL CIRCULATION SYSTEM
TURNTABLE		UPPER ENTRY FLOOR
TYPE		DK-CG-H2-20T
NUMBER OF CARS		SEDAN, 20 CARS
MAIN LIFT	DRIVING TYPE	ROLLER CHAIN
	DRIVING SPEED	20 m/min
	DRIVING MOTOR	15 kw
SLIDING	DRIVING TYPE	MOTOR OPERATED
	SPEED	30 m/min
	MOTOR	3.7kw
TURNTABLE	TYPE	MOTOR OPERATED
	SPEED	1.5 RPM
	MOTOR	1.5 kw x 2EA
OPERATION		TOUCH SCREEN TYPE
ELECTRIC POWER SOURCES		380V-60Hz-3Φ4W-30KW

AUTO DOOR	1	
ENTRANCE	2600(W) x 2100(H)	mm
DOOR TYPE	2-UP PANNEL TYPE	
MOTOR	0.2Kw x 4P x 1/20	
OPEN/CLOSE SPEED	20	m/min
ELECTRIC POWER SOURCES	380V-60Hz-3상	

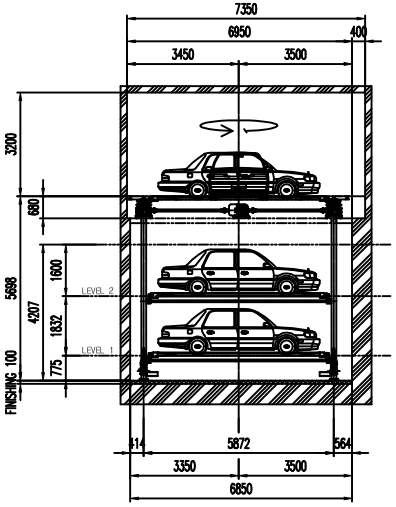

SECTION VIEW "A"-"A"

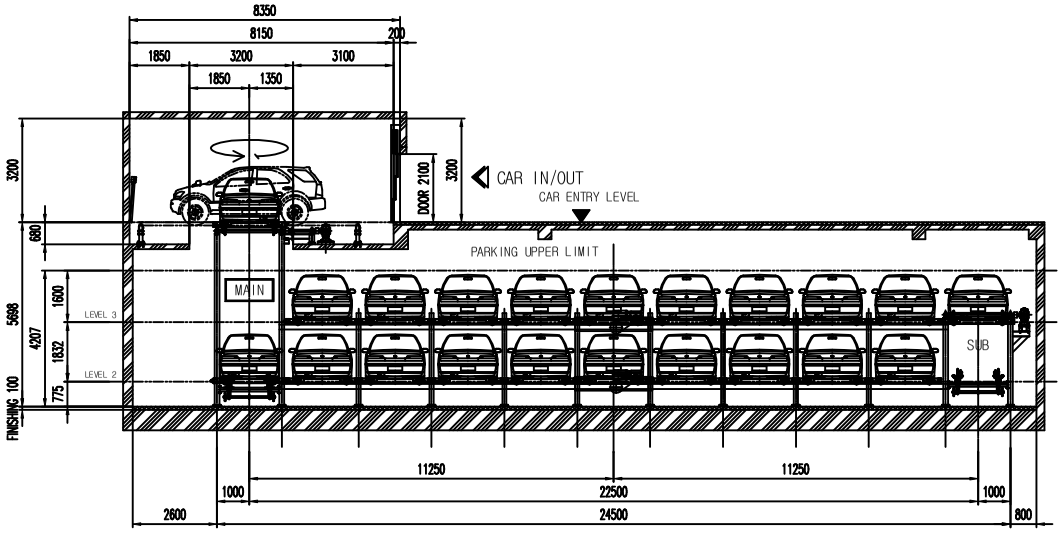

FRONT VIEW

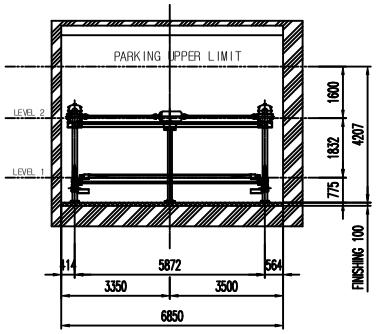

SECTION VIEW "B"-"B"